AUTHENTICATED
U.S. GOVERNMENT
INFORMATION
GPO

APPENDIX B TO SUBPART II OF PART 63—MAXIMUM ALLOWABLE THINNING RATES AS A FUNCTION OF AS SUPPLIED VOC CONTENT AND THINNER DENSITY

Appendix B To Subpart II of Part 63 -- Maximum Allowable Thinning Rates As A Function Of As Supplied VOC Content And Thinner Density[a,b]

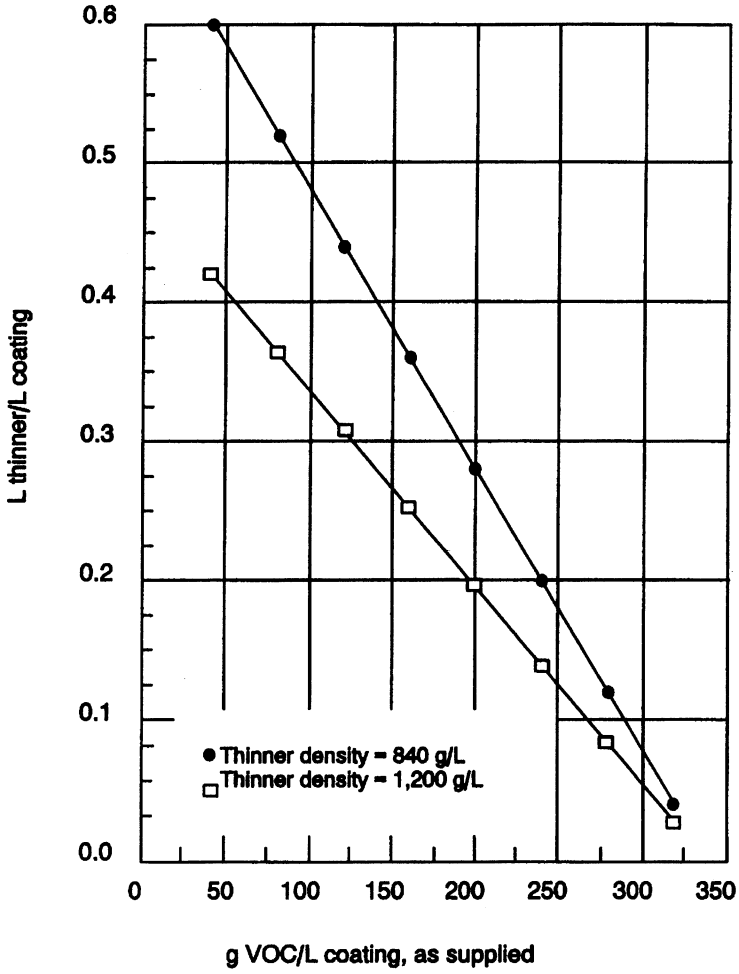

[a] These graphs represent maximum allowable thinning ratios for general use coatings without water or exempt compounds.
[b] The average density of the volatiles in the coating was assumed = 840 g solvent/L solvent.