



§ 73.699 TV engineering charts.


This section consists of the following Figures: 1-5, 5a, 6-10, 10a-10e, 11-12, 13-16.

NOTE: The charts as reproduced herein, due to their small scale, are not to be used in connection with material submitted to the F.C.C.

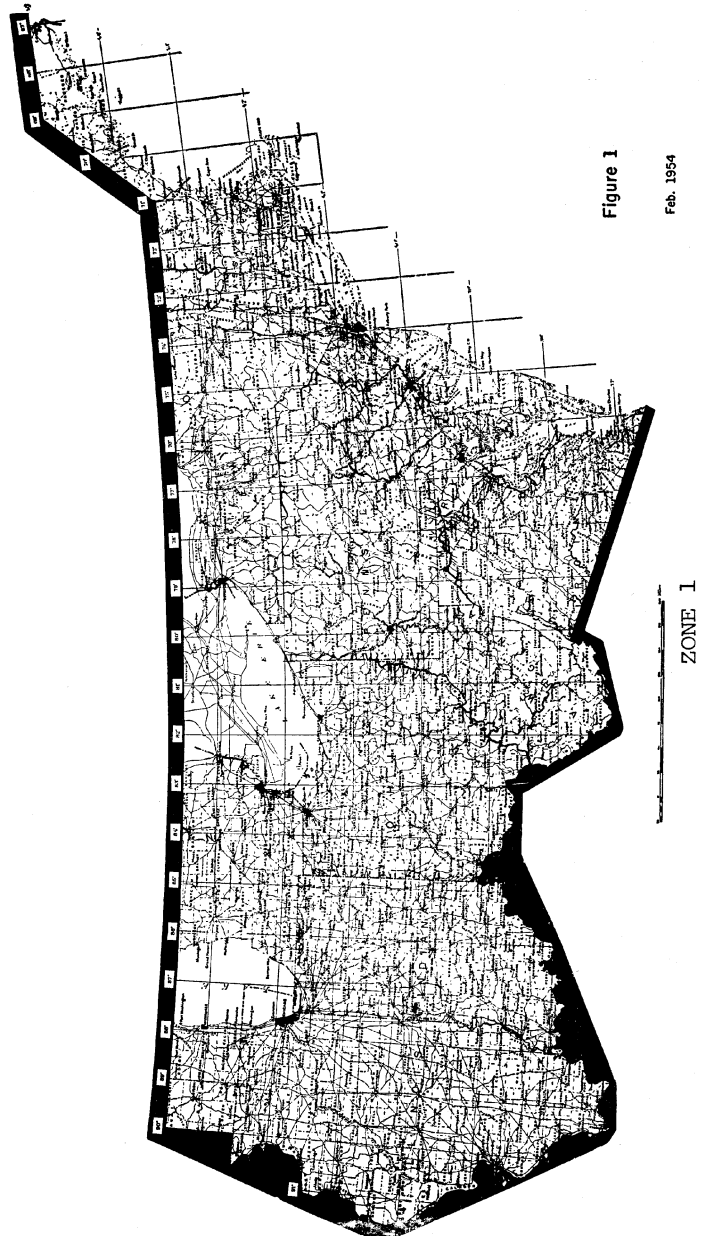

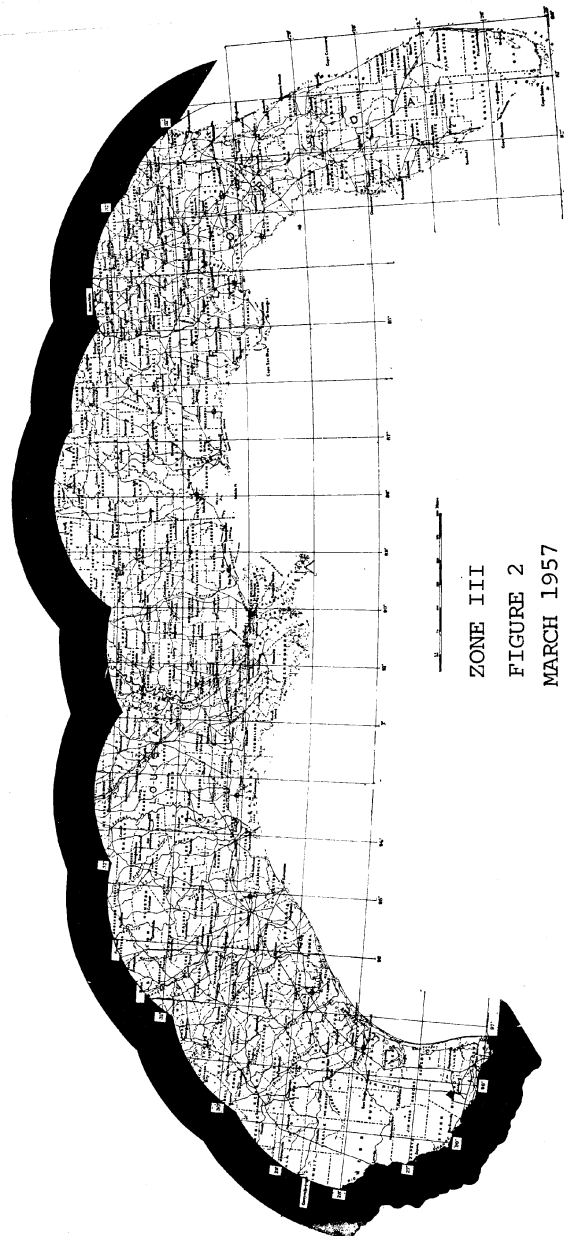

**IDEALIZED PICTURE TRANSMISSION
AMPLITUDE CHARACTERISTIC**

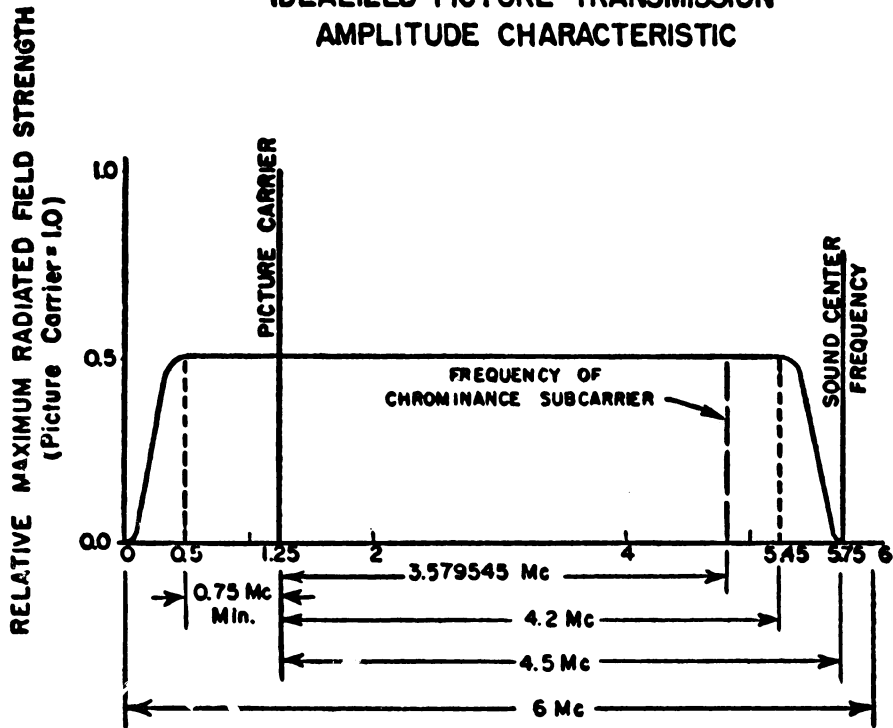

Note: Not drawn to scale

FIGURE 5

IDEALIZED PICTURE TRANSMISSION
AMPLITUDE CHARACTERISTIC

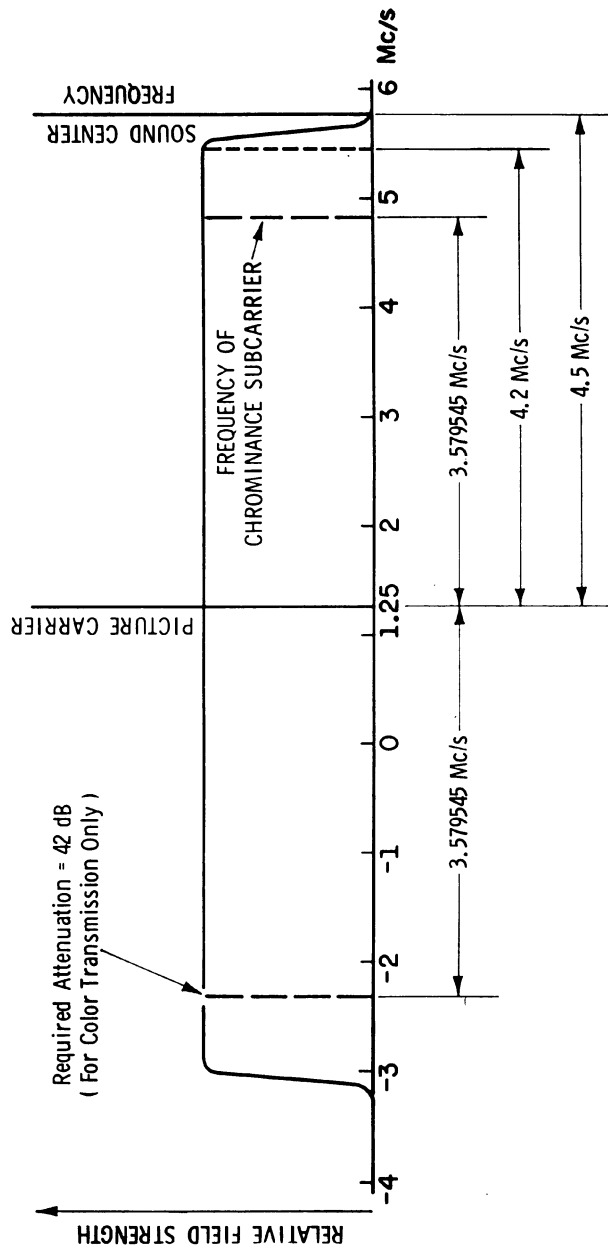


FIGURE 5 (a)



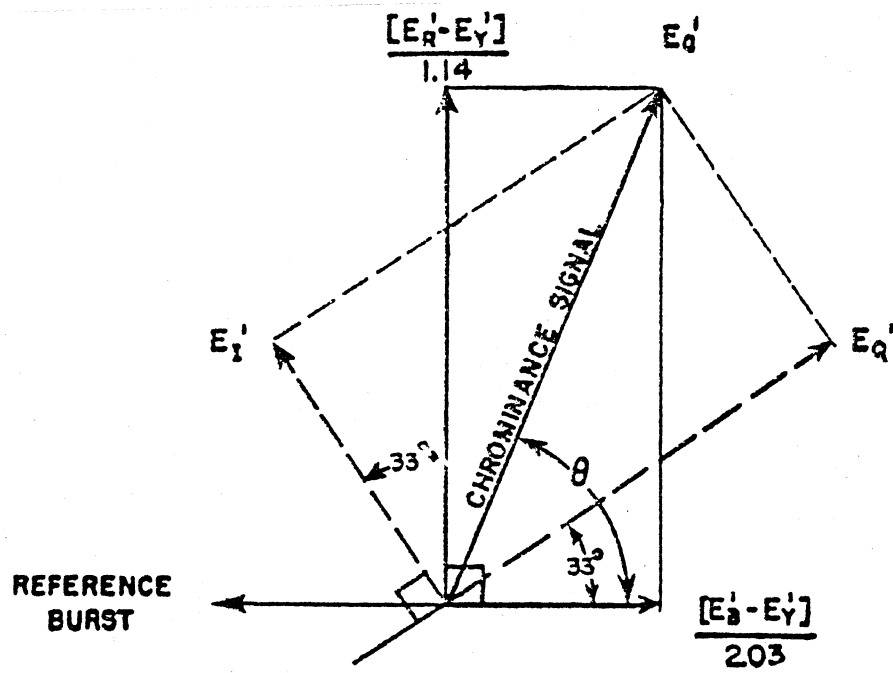


FIGURE 8

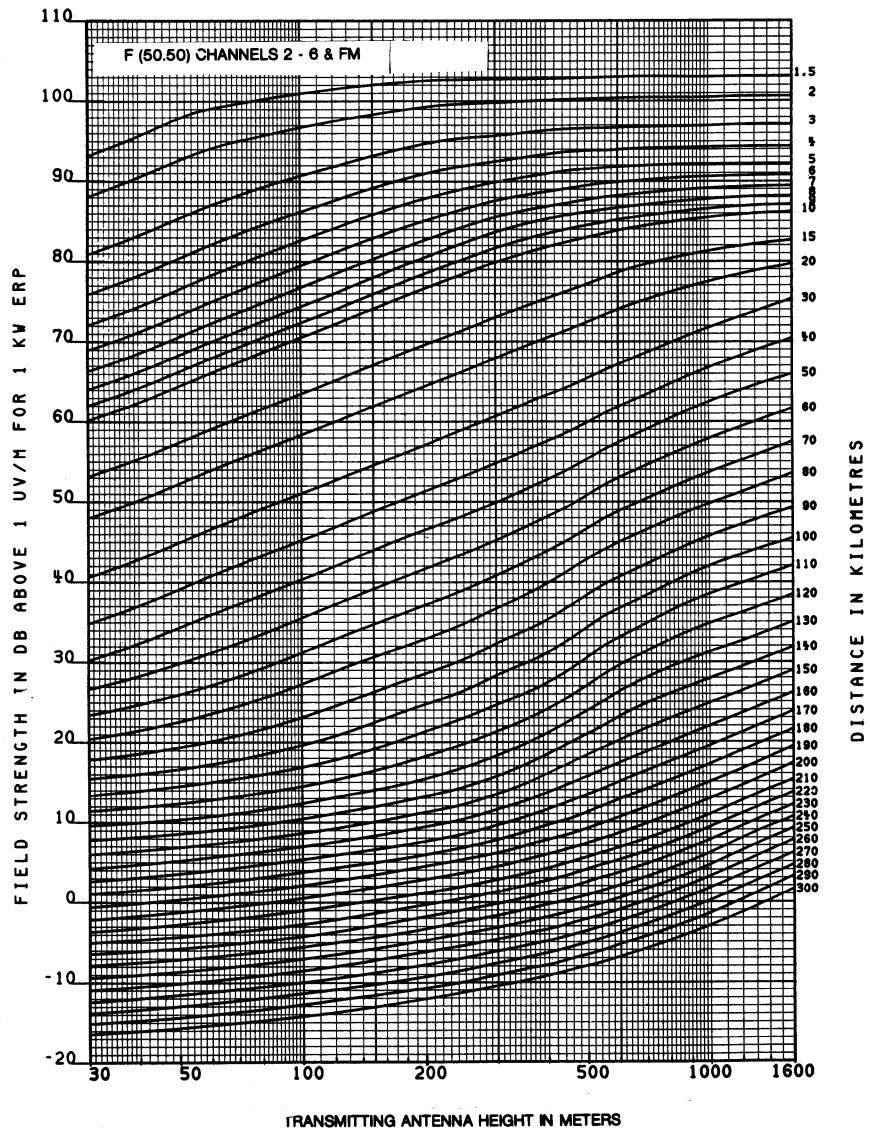


FCC 73.699 Figure 9

ESTIMATED FIELD STRENGTH EXCEEDED AT 50 PERCENT
 OF THE POTENTIAL RECEIVER LOCATIONS FOR AT LEAST 50 PERCENT
 OF THE TIME AT A RECEIVING ANTENNA HEIGHT OF 9 METERS

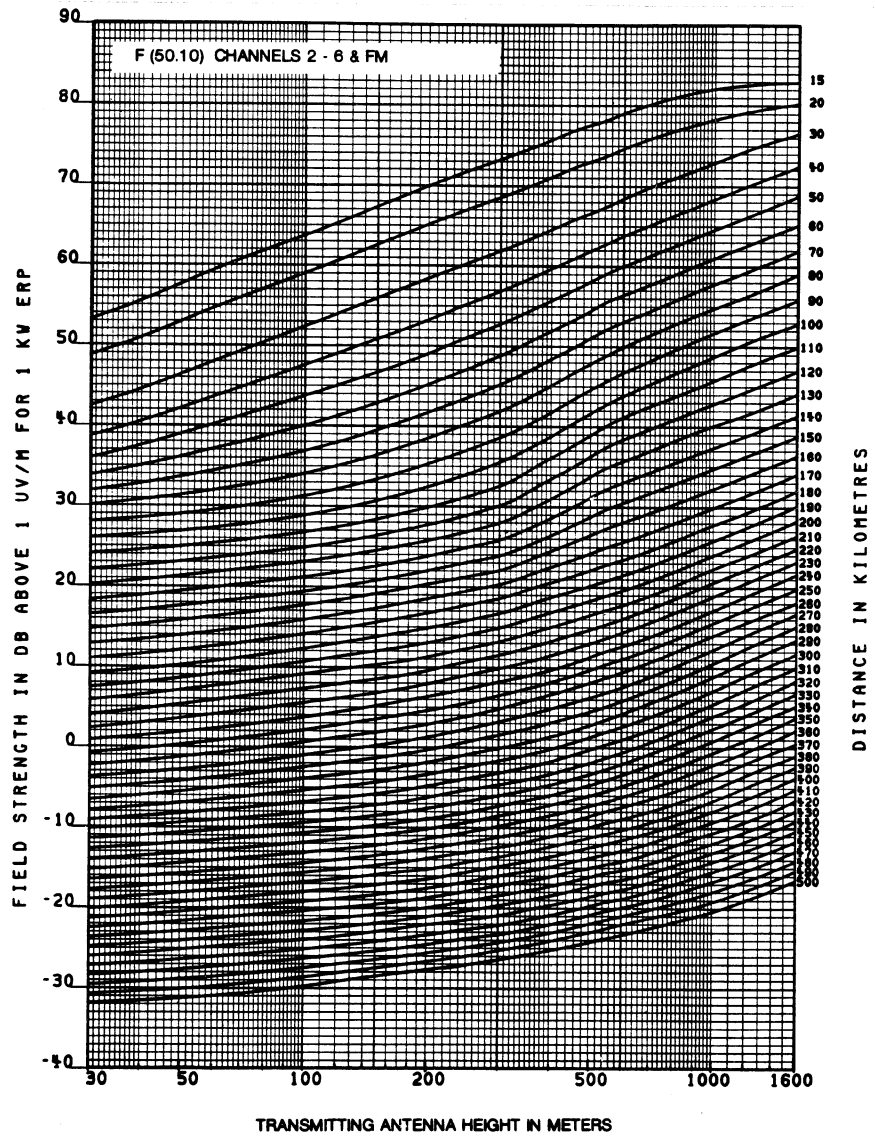


FCC 73.699 Figure 9a

ESTIMATED FIELD STRENGTH EXCEEDED AT 50 PERCENT OF THE POTENTIAL RECEIVER LOCATIONS FOR AT LEAST 10 PERCENT OF THE TIME AT A RECEIVING ANTENNA HEIGHT OF 9 METERS

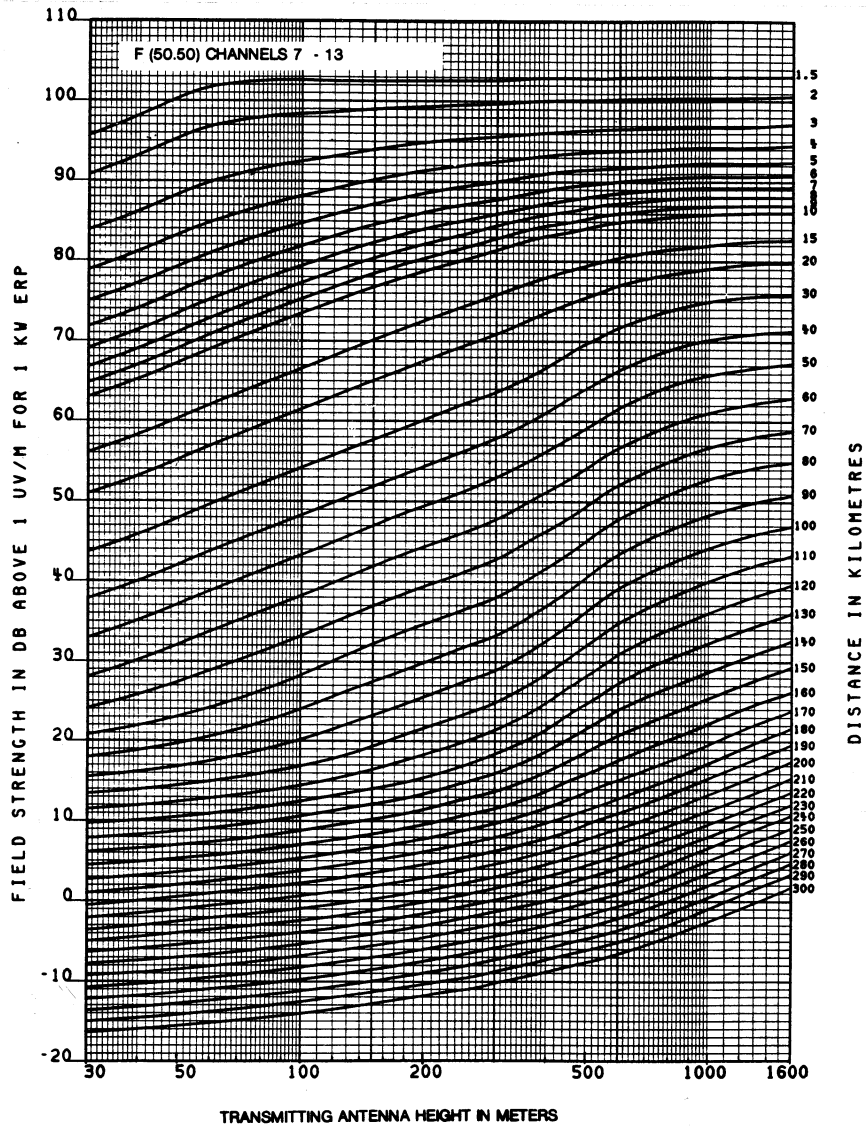


FCC 73.699 Figure 10

ESTIMATED FIELD STRENGTH EXCEEDED AT 50 PERCENT
 OF THE POTENTIAL RECEIVER LOCATIONS FOR AT LEAST 50 PERCENT
 OF THE TIME AT A RECEIVING ANTENNA HEIGHT OF 9 METERS

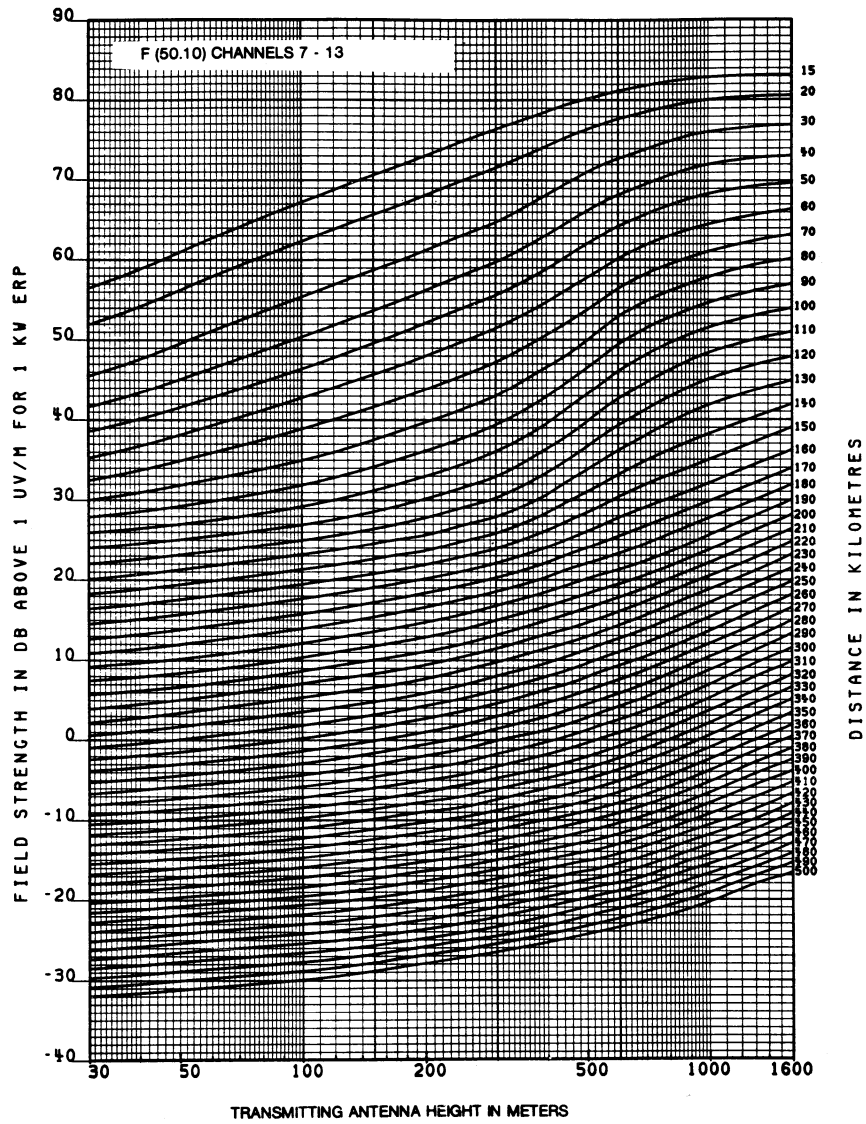


FCC 73.699 Figure 10a

ESTIMATED FIELD STRENGTH EXCEEDED AT 50 PERCENT OF THE POTENTIAL RECEIVER LOCATIONS FOR AT LEAST 10 PERCENT OF THE TIME AT A RECEIVING ANTENNA HEIGHT OF 9 METERS

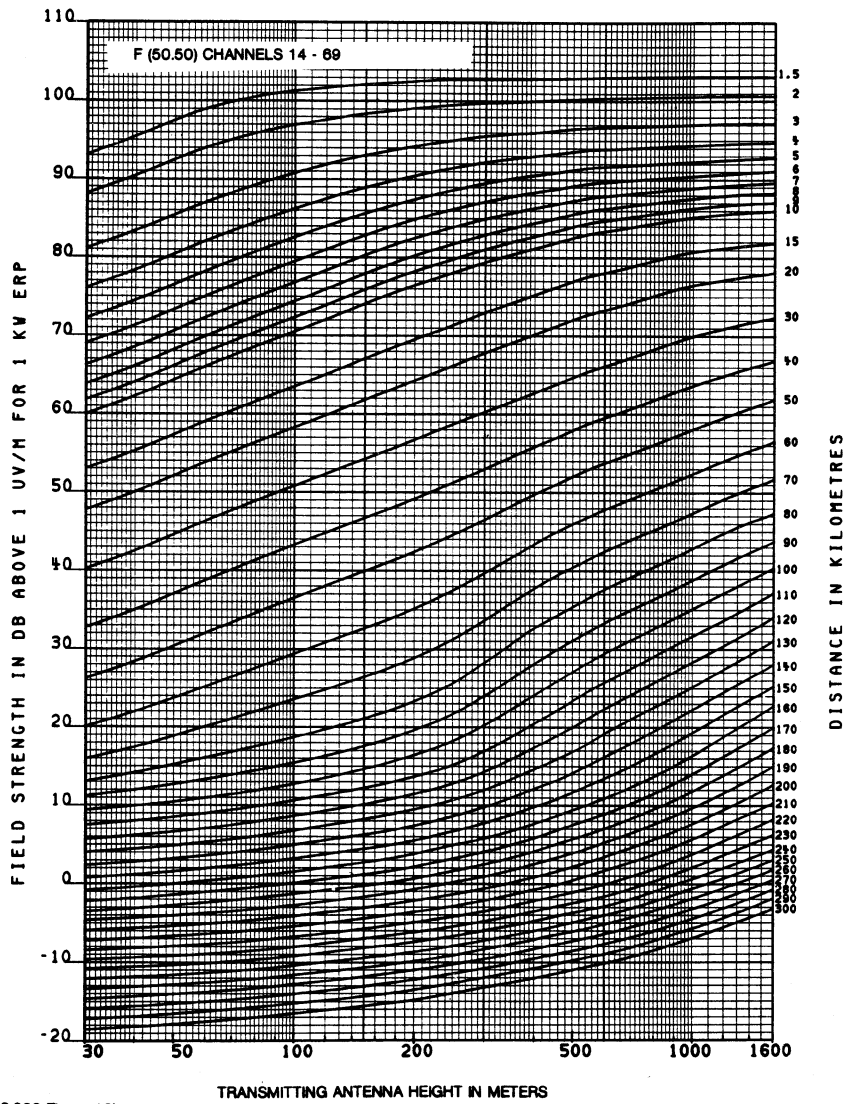


FCC 73.699 Figure 10b

ESTIMATED FIELD STRENGTH EXCEEDED AT 50 PERCENT
OF THE POTENTIAL RECEIVER LOCATIONS FOR AT LEAST 50 PERCENT
OF THE TIME AT A RECEIVING ANTENNA HEIGHT OF 9 METERS

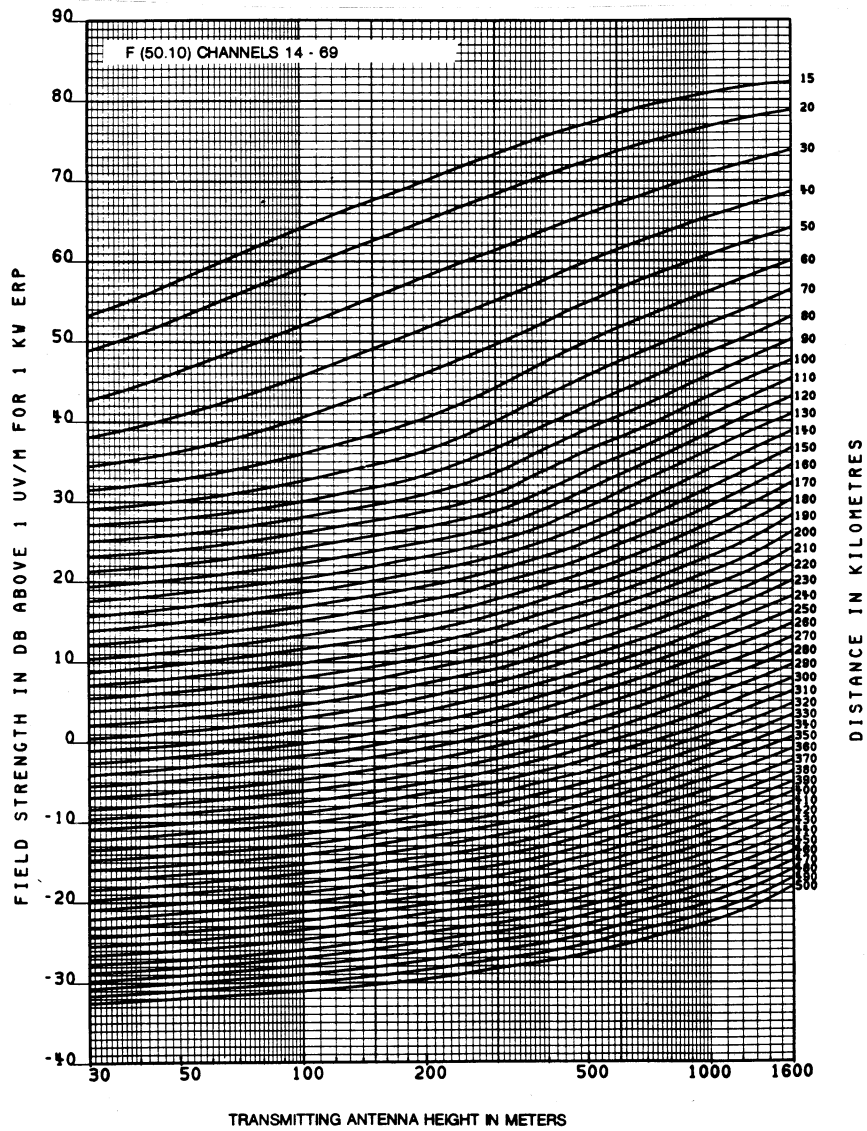


FCC 73.699 Figure 10c

ESTIMATED FIELD STRENGTH EXCEEDED AT 50 PERCENT
 OF THE POTENTIAL RECEIVER LOCATIONS FOR AT LEAST 10 PERCENT
 OF THE TIME AT A RECEIVING ANTENNA HEIGHT OF 9 METERS

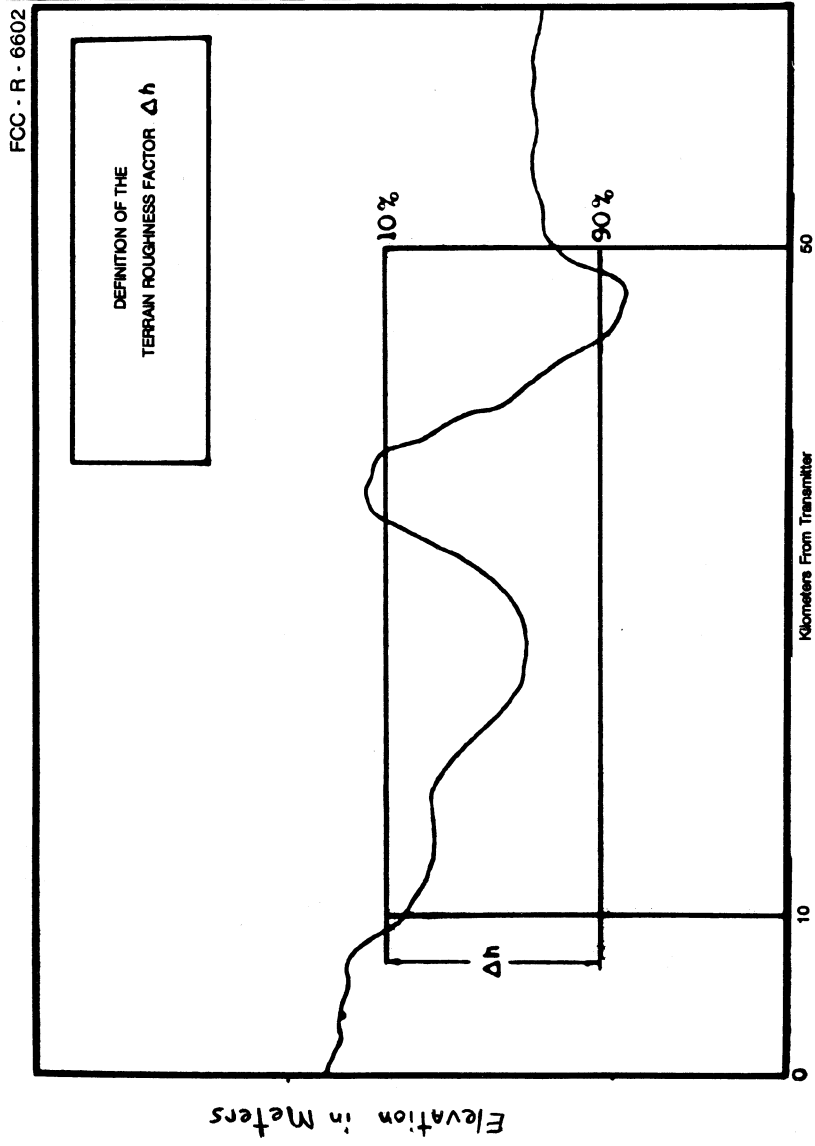

FCC § 73.699 FIGURE 10d

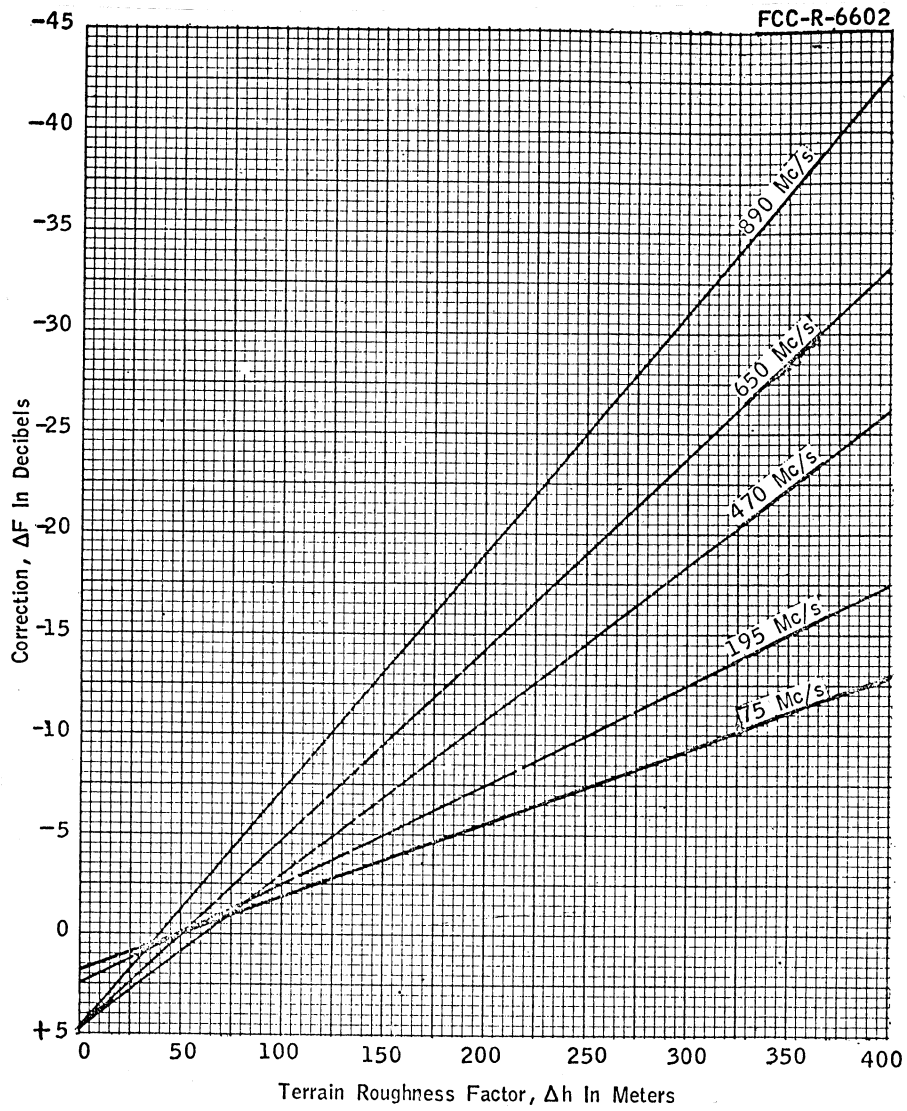

TERRAIN ROUGHNESS CORRECTION
 for use with estimated $F(50,50)$ and $F(50,10)$ field strength curves
 FCC §73.699 FIGURE 10e

ASSUMED IDEAL DETECTOR OUTPUT




FIGURE 11


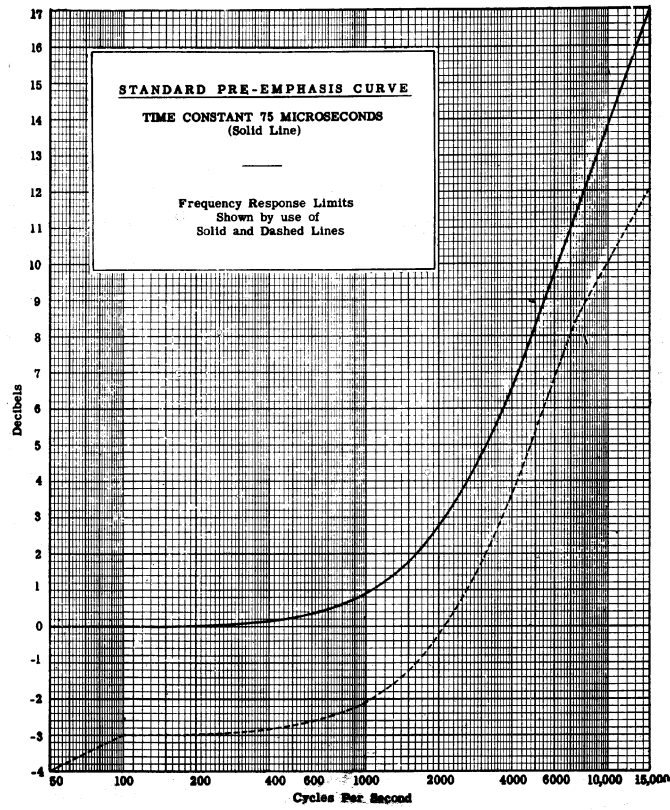


FIGURE 12

FIGURES 13 THROUGH 15 [RESERVED]

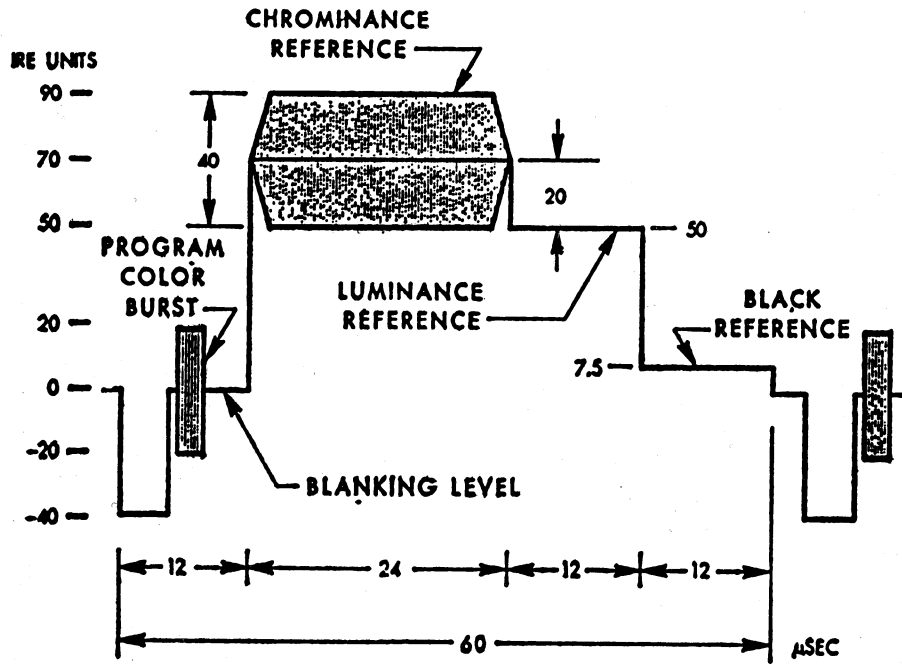

NOTE: THE CHROMINANCE REFERENCE AND THE PROGRAM COLOR BURST HAVE THE SAME PHASE.

FIGURE 16

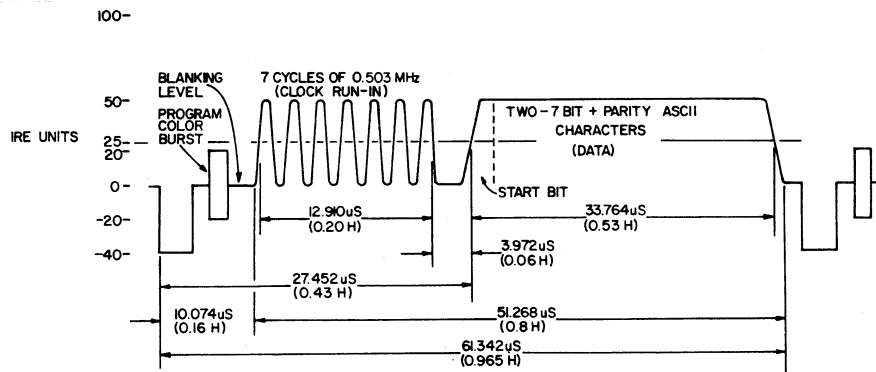


FIGURE 17 LINE 21 FIELD DATA SIGNAL FORMAT

1. DATA "1" = 50 IRE UNITS, DATA "0" = 0.
2. DATA PULSE RISE TIME = 2 T BAR RISE TIME.
3. DATA TIME BASE = $32 T_H$ (0.50349650 MHz).
4. DATA BIT INTERVAL = $H/32$ (1.986µs).
5. NEGATIVE GOING ZERO CROSSINGS OF CLOCK ARE COHERENT WITH DATA TRANSITIONS.
6. DATA AND CLOCK RUN-IN COHERENT WITH H.

HORIZONTAL DIMENSIONS NOT TO SCALE

FCC § 73.699, Figure 17

[28 FR 13660, Dec. 14, 1963, as amended at 36 FR 17429, Aug. 31, 1971; 39 FR 40957, Nov. 22, 1974; 40 FR 27684, July 1, 1975; 41 FR 56326, Dec. 28, 1976; 44 FR 36040, June 20, 1979; 47 FR 3790, Jan. 27, 1982; 47 FR 35990, Aug. 18, 1982; 50 FR 13972, Apr. 9, 1985; 50 FR 23701, June 5, 1985; 50 FR 32205, Aug. 9, 1985; 52 FR 11656, Apr. 10, 1987; 54 FR 9807, Mar. 8, 1989; 58 FR 29983, May 25, 1993]

EFFECTIVE DATE NOTE: At 42 FR 25736, May 19, 1977, the effective date of § 73.699 Figure 10e was stayed indefinitely.

Subpart F—International Broadcast Stations

§ 73.701 Definitions.

The following definitions apply to terminology employed in this subpart:

(a) *International broadcast stations.* A broadcasting station employing frequencies allocated to the broadcasting service between 5900 and 26100 kHz, the transmissions of which are intended to be received directly by the general public in foreign countries. (A station may be authorized more than one transmitter.) There are both Federal and non-Federal Government international broadcast stations; only the latter are licensed by the Commission and are subject to the rules of this subpart.

(b) *Transmitter-hour.* One frequency used on one transmitter for one hour.

(c) *Frequency-hour.* One frequency used for one hour regardless of the number of transmitters over which it is simultaneously broadcast by a station during that hour.

(d) *Multiple operation.* Broadcasting by a station on one frequency over two or more transmitters simultaneously. If a station uses the same frequency simultaneously on each of two (three, etc.) transmitters for an hour, it uses one frequency-hour and two (three, etc.) transmitter-hours.

(e) *Coordinated Universal Time (UTC).* Time scale, based on the second (SI), as defined in Recommendation ITU-R TF.460-6. For most practical purposes associated with the ITU *Radio Regulations*, UTC is equivalent to mean solar time at the prime meridian (0° longitude), formerly expressed in GMT. (RR)